

# FASSILUX AQUA XPE

FASSILUX AQUA XPE THE BEST OF BOTH WORLDS




HIGH QUALITY WATERBASED TOPCOAT

FOR ALL APPLICATIONS



INDOOR AND OUTDOOR



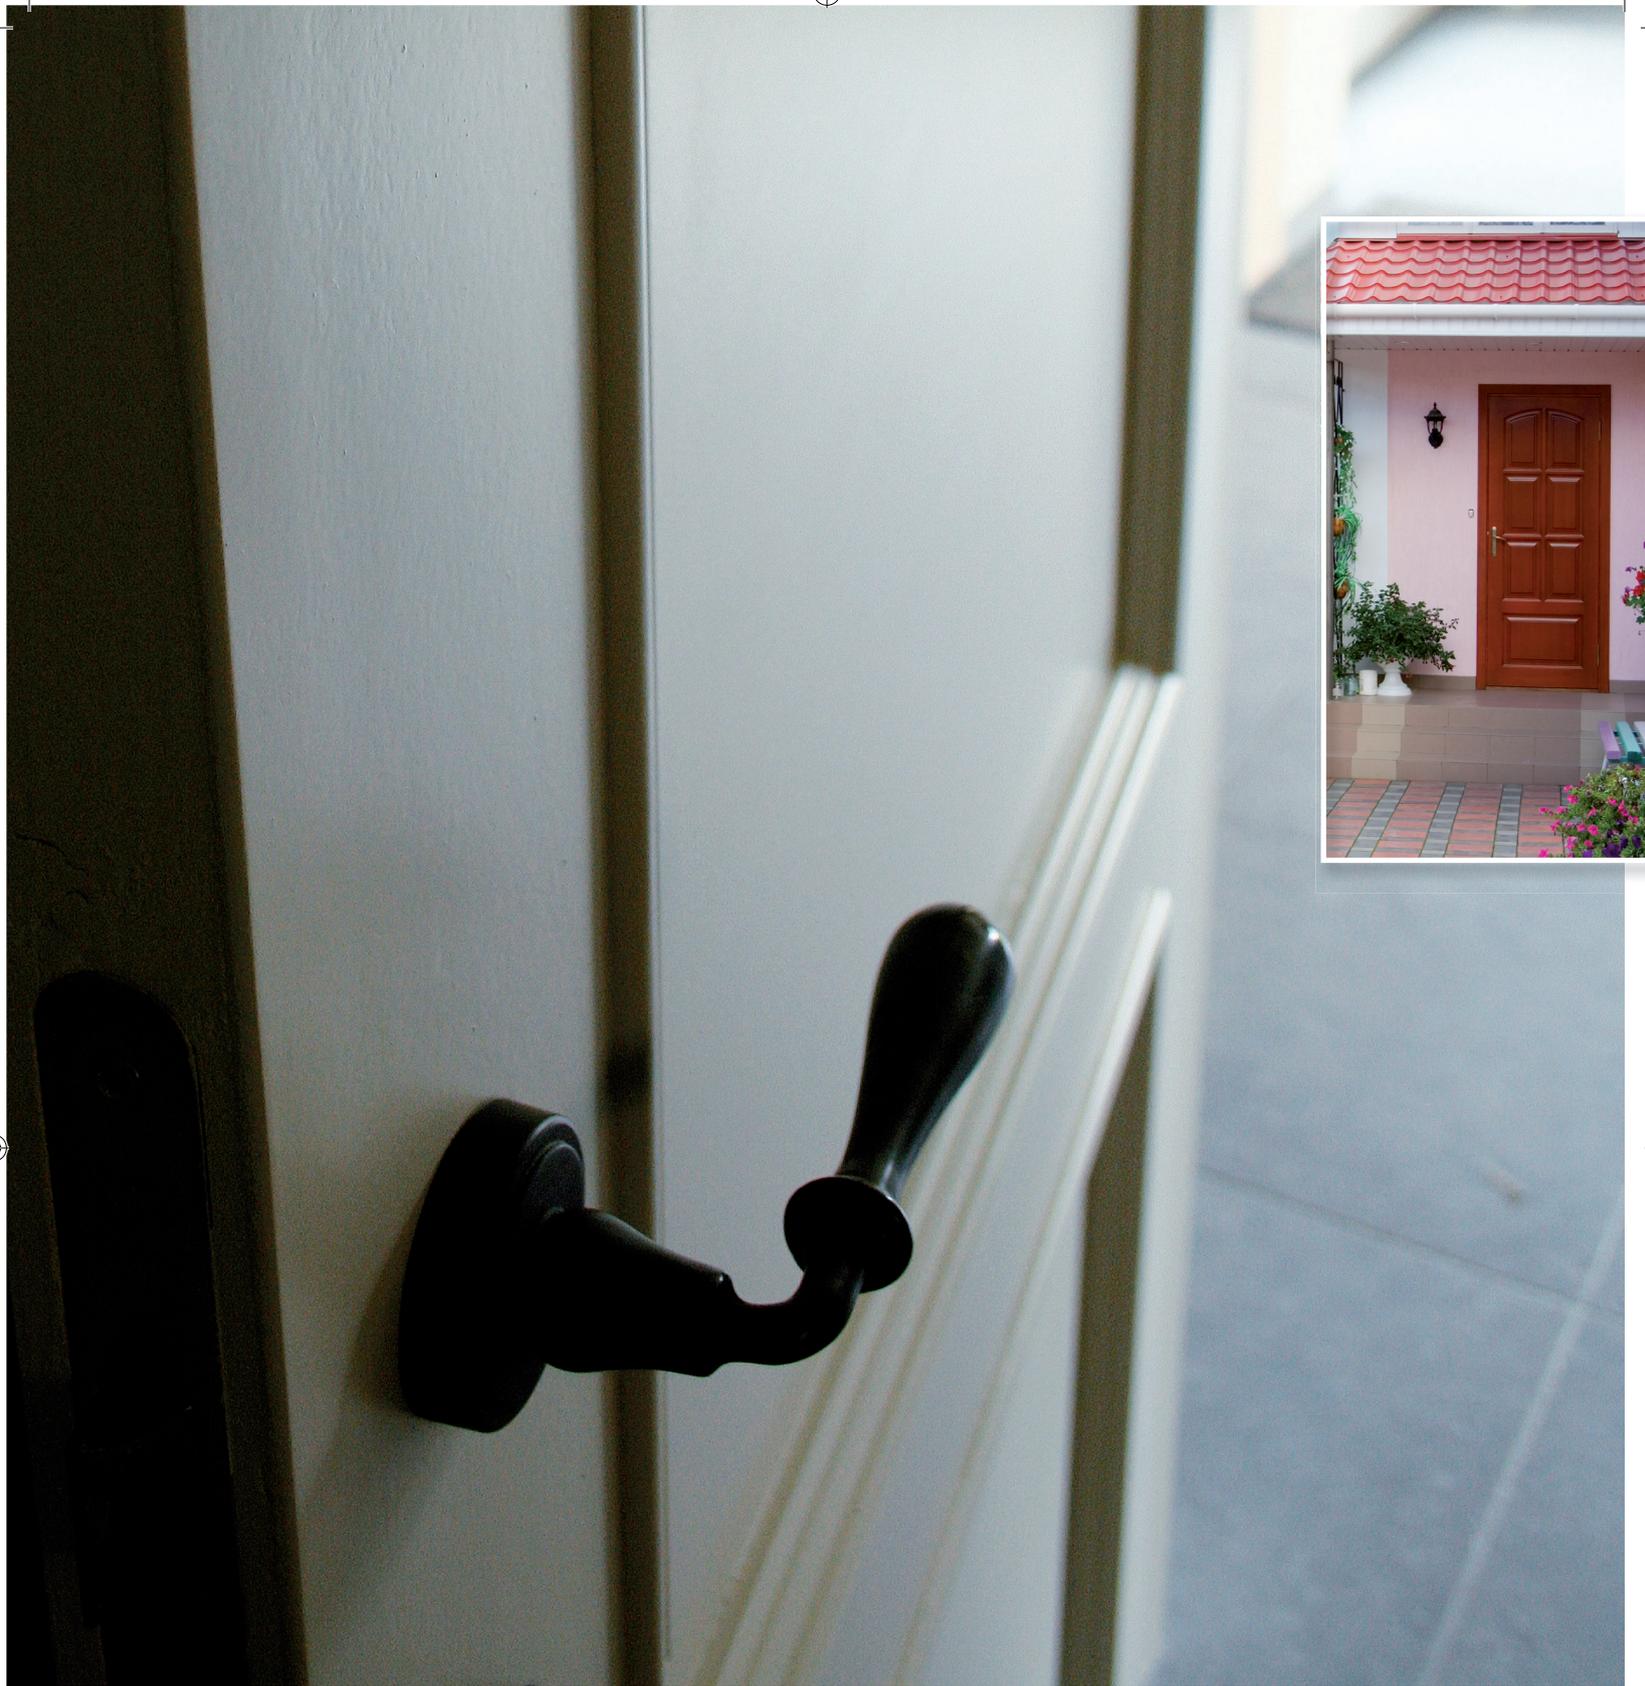

## High quality waterbased topcoat for all indoor and outdoor applications

*Mathys Fassilux enamel systems are still among those most highly regarded by professional painters. It is not for nothing that we continue to innovate them, thereby making the Fassilux range grow into the quality enamel that sets the standards in new construction and maintenance.*

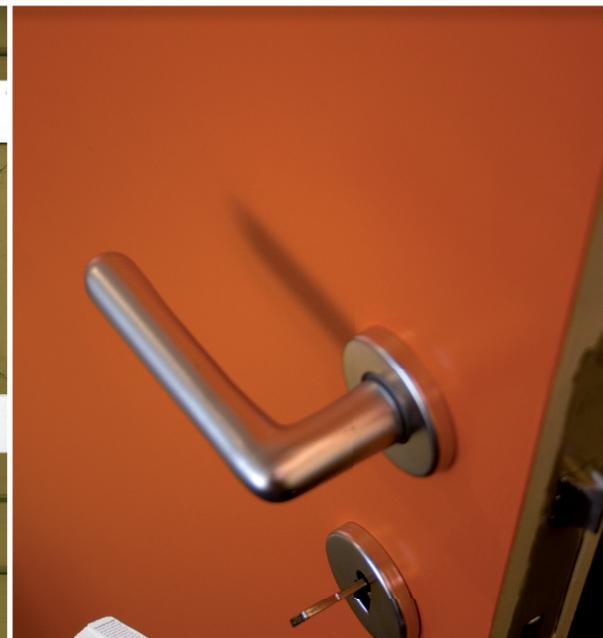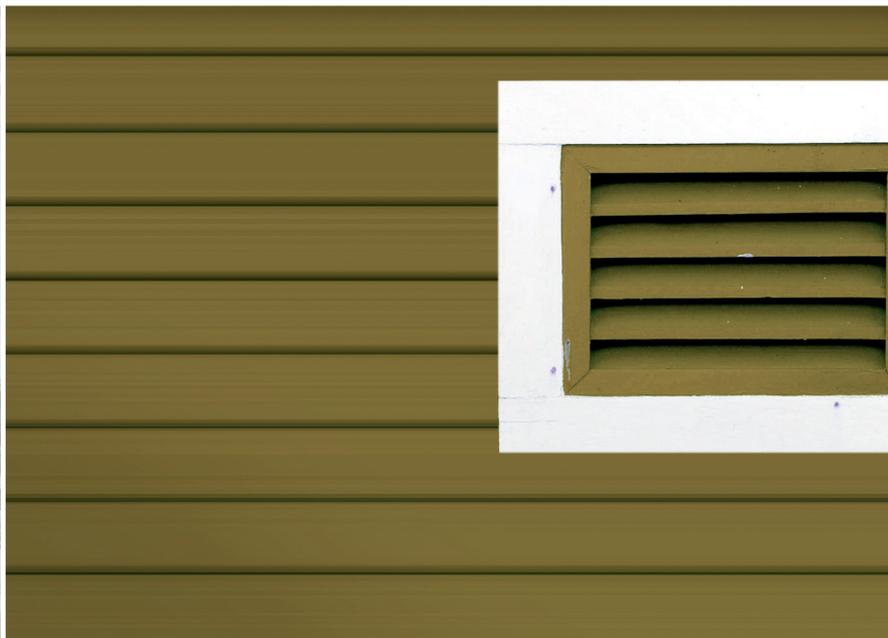

## Fassilux Aqua XPE The best of both worlds.

The new Fassilux Aqua XPE waterbased primer and topcoats (using a polyurethane/alkyd emulsion) are in practice just as simple to use as solvent based topcoats and have the advantages of a waterbased system. Fassilux Aqua XPE is easy and quick to apply and has excellent flow properties to ensure smooth, well finished paint work.

## Fassilux Aqua XPE

- Quick and easy to use
- For both interior and exterior use
- Very good coverage and adhesion
- Quick drying
- Hard wearing and scratch resistant
- Low odour and safe (minimal VOC content)
- Even, stable gloss
- Elastic
- Colourfast
- Available in a finish Satin and High-Gloss



A topcoat where the **ColourShop colour mixing system** gives you an unlimited range of colours.

*In comparison with other water based topcoats, the new Fassilux Aqua XPE performs as a TOP-coat in every respect.*



<b>Fassilux Aqua XPE</b>			
	Fassiprim Aqua XPE	Fassilux Aqua XPE	
	<b>Primer</b>	<b>Gloss</b>	<b>Satin</b>
<b>Description</b>	Fast drying, breathing primer for wood	Scratch resistant topcoat for wood and metal	Scratch resistant topcoat for wood and metal
<b>System</b>	Waterbased acrylic dispersion	Waterbased polyurethane/alkyd emulsion	Waterbased polyurethane/alkyd emulsion
<b>Application</b>	Interior and exterior	Interior and exterior	Interior and exterior
<b>Gloss level</b>	Semi-Matt	High-Gloss	Satin
<b>Coverage</b>	approx. 10m <sup>2</sup> /l	approx. 12m <sup>2</sup> /l	approx. 12m <sup>2</sup> /l
<b>Recommended film thickness</b>	± 40 micron (dry film)	± 30 micron (dry film)	± 30 micron (dry film)
<b>VOC-content (max.)</b>	17g/l	23g/l	22g/l
<b>Dustfree after*</b>	approx. 1 h.	approx. 3 h.	approx. 3 h.
<b>Recoatable after*</b>	approx. 3 h.	approx. 24 h.	approx. 24 h.
<b>Colours</b>	white + colours via ColourShop	white + colours via ColourShop	white + colours via ColourShop
<b>Packaging</b>	1 - 2,5L	1 - 2,5L	1 - 2,5L

\*20°C/50% r.h.

Your distributor:

These guidelines are provided for information purposes only. Since the manufacturer is unable to exercise any control over the correct application and processing of the products, he cannot accept any responsibility for this.

## **RUST-OLEUM MATHYS**

best solutions in paints & coatings

An **RPM** Company

### **Rust-Oleum Netherlands B.V.**

P.O. Box 138  
4700 AC Roosendaal  
The Netherlands  
T: +31 (0) 165 593 636  
F: +31 (0) 165 593 600  
info.nl@ro-m.com  
www.ro-m.com

### **Rust-Oleum UK Ltd.**

Unit 6, Spitfire Close  
Coventry Business Park  
Coventry, CV5 6UR  
United Kingdom  
T +44 (0)2476 717 329  
F +44 (0)2476 718 930  
info.uk@ro-m.com  
www.ro-m.com

### **Rust-Oleum France S.A.S.**

11, rue Jules Verne - B.P. 60039  
95322 St-Leu-La-Forêt Cedex  
France  
T: +33 (0) 130 40 00 44  
F: +33 (0) 130 40 99 80  
info.fr@ro-m.com  
www.ro-m.com

### **Rust-Oleum Mathys Italia s.r.l.**

Largo Donegani 2  
20121 Milan  
Italy  
T: +39 335 10 93 482  
info.it@ro-m.com  
www.ro-m.com

### **N.V. Martin Mathys S.A.**

Kolenbergstraat 23  
3545 Zelem  
Belgium  
T: +32 (0) 13 460 200  
F: +32 (0) 13 460 201  
info.be@ro-m.com  
www.ro-m.com

MBROFAQXPE.GB - 11.08