



# TIMBEREX®

*wood finishing oil*



The Finest Natural Protection

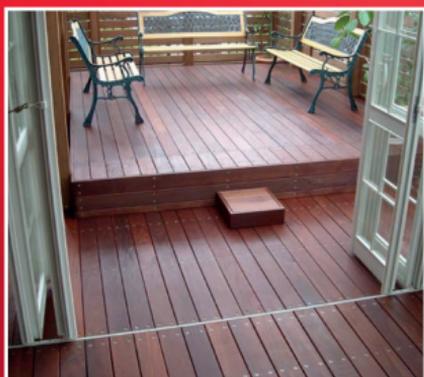

The Timberex® brand has been recognised in over 40 countries worldwide for quality and competence in the field of wood finishing oils since 1927.

## Index

### Oils for interior use

TIMBEREX® Natural	P 06
TIMBEREX® Coloured	P 07
TIMBEREX® Heavy Duty UV Plus	P 08
TIMBEREX® Heavy Duty UV	P 09
TIMBEREX® Hardwax oil	P 10
TIMBEREX® Wax oil	P 12
TIMBEREX® Gold	P 13
TIMBEREX® Free	P 14

### Oils for exterior use

TIMBERGUARD®	P 16
TIMBERGUARD® Mousse	P 18

### Maintenance products

TIMBEREX® Satin Oil	P 20
TIMBEREX® Satin Oil Gold	P 22
TIMBEREX® Satin Oil Gold Mousse	P 23
TIMBEREX® Bio-C	P 24
TIMBEREX® Oil & Wax Remover	P 26

### Water-based products

TIMBEREX® Aqua	P 28
TIMBEREX® Aqua Plus	P 29
TIMBEREX® Active Stain	P 30
TIMBEREX® Enviro	P 32

TIMBEREX® is ISO9001 and EN71 certified and produces environmentally friendly and durable oils from natural renewable resources and in accordance with the latest international specifications. TIMBEREX® is a part of the Rust-Oleum Europe Group.

a **RUST-OLEUM®** brand


Our experienced sales and technical teams will be pleased to advise you in the use of our products, so please do not hesitate to contact us. Tel.: +32(0)13 460 200.



## The philosophy of using TIMBEREX® oils

Oiling provides a deep penetrating, long term and cost effective finish for all timber floors and wooden surfaces. Oiling is suitable in busy commercial areas as well as being ideal for domestic situations.

Fast curing, water and wear-resistant, the deep penetrating oils protect wood from within and are superior to thin surface coatings. Refurbishment is easily completed without sanding by simple application of refurbishing oils in conjunction with light buffing. We provide a full range of industrial oils, contractor and DIY tailored finishes, and cleaning and maintenance products.

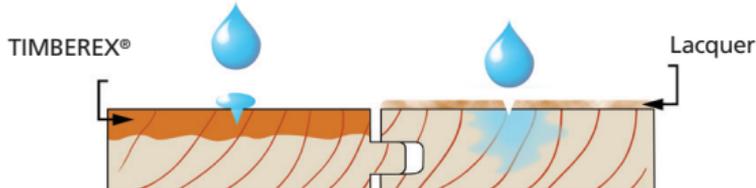

Oils produce a long-term deep protection to wood from spillage, even after surface damage

## The Timberex® advantage

What makes TIMBEREX® different from other manufacturers of wood oils?

1. We don't use water or fillers in our oils, this improves drying time, product quality and increases the coverage rate.
2. Our high-quality products require a minimum of maintenance.
3. Very low VOC in our products, some are even VOC-free.
4. Our products are food- and toy-safe (EN 71-3 certified).
5. Our products are not flammable.

## Timberex® & the Environment


We, the manufacturers, have the responsibility to ensure the health and safety of the people using our products as well as looking after the environment. Something we at Timberex® take very seriously.

All of our oils are made from natural, renewable oils and waxes. This reduces the environmental impact.

Also, we keep our VOC levels very low, reducing harmful emissions.

Several independent test agencies have certified our products, including Eurofins (Grenelle), Byggarubedömningen (Environmental impact) and Bureau Veritas (Food- and Toy-Safe)

## Timberex® Emission result according to French law:

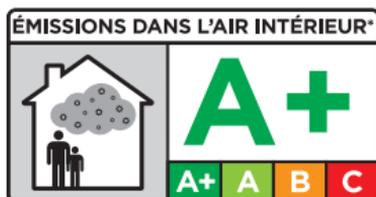

« \*Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions) ».

## Product selector

		COVERAGE	DOMESTIC	HEAVY TRAFFIC	FAST DRYING	COLOURING	SOLVENT-FREE	PAGE
INTERIOR	TIMBEREX® NATURAL	5-7 m <sup>2</sup> /l	•		•			6
	TIMBEREX® COLOURED	6-10 m <sup>2</sup> /l	•	•	•	•		7
	TIMBEREX® HEAVY-DUTY UV PLUS	12-15 m <sup>2</sup> /l	•	•	•			8
	TIMBEREX® HEAVY-DUTY UV	7-10 m <sup>2</sup> /l	•	•				9
	TIMBEREX® HARD-WAX OIL	9-12 m <sup>2</sup> /l	•	•				10
	TIMBEREX® WAX OIL	15-20 m <sup>2</sup> /l	•		•		•	12
	TIMBEREX® GOLD	15-20 m <sup>2</sup> /l	•		•		very low	13
	TIMBEREX® FREE	15-20 m <sup>2</sup> /l	•	•			•	14
EXTERIOR	TIMBERGUARD® NATURAL	6-10 m <sup>2</sup> /l	•	•				16
	TIMBERGUARD® COLOURED	6-10 m <sup>2</sup> /l	•	•		•		17
	TIMBERGUARD® MOUSSE	20-30 m <sup>2</sup> /l	•		•			18
MAINTENANCE	TIMBEREX® SATIN	15-20 m <sup>2</sup> /l	•	•				20
	TIMBEREX® SATIN GOLD	20-30 m <sup>2</sup> /l	•	•				22
	TIMBEREX® SATIN GOLD MOUSSE	20-30 m <sup>2</sup> /l	•	•				23
	TIMBEREX® BIO-C	100-200 m <sup>2</sup> /l	•				•	24
	TIMBEREX® OIL&WAX REMOVER	7-10 m <sup>2</sup> /l	•		•			26
WATERBASED	TIMBEREX® AQUA	18-20 m <sup>2</sup> /l	•			•	•	28
	TIMBEREX® AQUA PLUS	12-15 m <sup>2</sup> /l	•	•	•	•	very low	29
	TIMBEREX® ACTIVE STAIN	8-12 m <sup>2</sup> /l	•			•	•	30
	TIMBEREX® ENVIRO	16-18 m <sup>2</sup> /l	•		•		•	32

## Logo explanation

In this brochure, you will find the following symbols. This what they mean:



### Food&Toy Safe:

The product is safe to use in food areas, like kitchen tabletops, kitchen floors. Approved EN71-3 by Bureau Veritas.



### R9-logo:

This product has been tested for anti-slip properties.



### Low VOC-logo:

The product has a very low VOC-content. Safe to use indoors in confined spaces, almost no harmful vapours.



### VOC-free:

The product contains no VOC. Safe to use indoors in confined spaces, with no vapours.



### AQUA-WB-logo:

This product is waterbased, and is also VOC-free. No risk of combustion of application tools, like cloths.

**TIMBEREX®**

*wood finishing oil*



Retirement home, Switzerland

*Interior*



Private residence, Sweden

## TIMBEREX® Natural

### *A traditional oil for domestic use*

TIMBEREX® Natural has been extensively used on wooden floors in thousands of homes throughout the world since 1927 and is also excellent on furniture, panelling etc. TIMBEREX® Natural is designed to penetrate deeply into the wood.

- Made from natural, fast drying oils
- Cured and buffed surface has a lustrous sheen with an easily cleaned silk finish
- Colour is enriched and grain patterns are highlighted on the smooth, easily maintained surface

### Availability

1 & 5 litre

### Coverage

5-7 m<sup>2</sup> per litre

### Applicators

Squeegee, roller or brush

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

### Maintenance

TIMBEREX® Satin Oil (page 20-21)  
 TIMBEREX® Satin Oil (page 22)  
 TIMBEREX® Satin Oil Gold Mousse (page 23)



Colours are shown for guidance only



Insurance company, Denmark

## TIMBEREX® Coloured

### *Pigmented oil in 8 different colours for decoration and protection*

Pigmented version of TIMBEREX® Natural. Eight attractive colours are available, each one enriching and enhancing the wood.

- Cured and buffed surface has a highly wear and water-resistant finish
- Colours can be mixed together for a wide range of effects
- Made from natural, fast drying oils and resins

#### Availability

1 & 5 litre tins

#### Coverage

6-10 m<sup>2</sup> per litre

#### Applicators

Squeegee, roller or brush

#### Nylon pads

Red or blue (3M or similar)

#### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

#### Maintenance

TIMBEREX® Satin Oil (page 20-21)

TIMBEREX® Satin Oil Gold (page 22)

TIMBEREX® Satin Oil Gold Mousse (page 23)

NEW AND  
IMPROVED!



## TIMBEREX® Heavy-Duty UV Plus

### Hard wearing oils for commercial and industrial use

TIMBEREX® Heavy-Duty UV PLUS is an improved version of the TIMBEREX® Heavy-Duty UV wood oil, with improved coverage, less odour, water resistance, UV resistance and faster curing. Heavy-Duty UV PLUS uses natural, fast drying oils and resins which penetrate deeply into the wood.

- Seals and protects wood from within
- For high traffic areas as airports, museums, conference centres and more
- UV-blockers prevent discoloration
- Protects the wood against liquids and stains
- Protects without losing the 'natural wood look'

### Availability

1 & 5 litre

### Coverage

12-15 m<sup>2</sup> per litre

### Applicators

Squeegee, roller or platform pad

### Nylon pads

Red (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner  
(page 24-25)

### Maintenance

TIMBEREX® Satin Oil  
(page 20-21)  
TIMBEREX® Satin Oil Gold (page 22)  
TIMBEREX® Satin Oil Gold Mousse  
(page 23)



Heathrow Airport, London

## TIMBEREX® Heavy-Duty UV

### *Hard wearing oil for commercial use*

Durable oil with UV-blocker which will inhibit the bleaching of the surface by harmful UV rays. Made from natural, fast drying oils and resins, Timberex Heavy Duty UV is designed to penetrate deeply into the wood. Filling and enriching the pores, it cures to seal and protect from within.

The buffed surface has a highly wear and water-resistant finish with a deep satin sheen. The natural color of the wood is enriched and grain patterns are highlighted on the smooth, easily maintained surface. Specially formulated for high traffic areas, Timberex Heavy Duty UV is being used extensively in airports, sports halls, museums, offices, conference centres etc.

### Availability

1 & 5 litre tins

### Coverage

7-10 m<sup>2</sup> per litre

### Applicators

Squeegee, roller or brush

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner  
(page 24-25)

### Maintenance

TIMBEREX® Satin Oil  
(page 20-21)  
TIMBEREX® Satin Oil Gold (page 22)  
TIMBEREX® Satin Oil Gold Mousse  
(page 23)



## TIMBEREX® Hard-Wax Oil

### *Quick drying durable protection for any wood surface*

This oil is offered in SATIN and MATT finish and can be used on floors, worktops surfaces and furniture. The products is easy-to-apply with no special tools required and will dry within hours and be ready for use within a few hours. TIMBEREX® Hard-Wax Oil is EN71 certified (food and toy-safe) and can also be used for maintenance, repairs and renovation.

- Very durable, for medium & high traffic areas
- Resistant to liquid spills
- Rapid curing
- High coverage per litre
- Easy application without any special tools





#### **Availability**

1 & 5 litre

#### **Coverage**

9-12 m<sup>2</sup> per litre

#### **Applicators**

Brush, roller or platform pad

#### **Nylon pads**

Red (3M or similar)

#### **Cleaner**

TIMBEREX® Bio-C (page 24-25)

#### **Maintenance**

TIMBEREX® Hard-Wax Oil (page 10-11)

*TIP: Best protection against liquid stains*



Markiezenhof Castle, the Netherlands

## TIMBEREX® Wax-Oil

*A solvent-free oil containing high-grade Carnauba wax, which greatly enhances colours and grain and allows wood to age naturally into rich varying tones.*

- Suitable for all common wood types intended for both commercial and domestic situations.
- Fast curing: application, wet- and dry-buffing on the same day
- Good coverage per litre
- Cures to a deep satin finish
- Easy to apply without any special tools

### Availability

1 & 5 litre tins

### Coverage

15-20 m<sup>2</sup> per litre

### Applicators

Rubber squeegee

### Nylon pads

Red or blue (3M or similar)


### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

### Maintenance

TIMBEREX® Satin Oil Gold (page 22)

TIMBEREX® Satin Oil Gold Mousse (page 23)

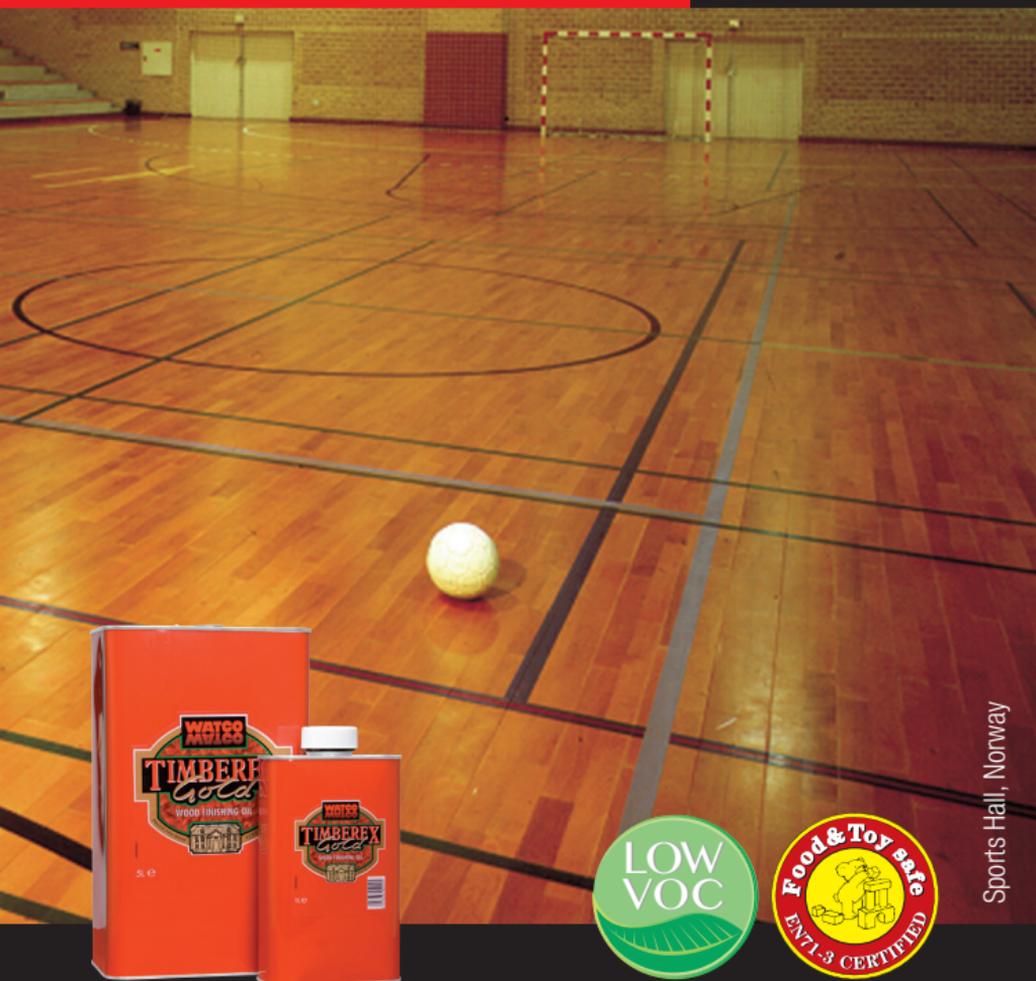

Sports Hall, Norway

## TIMBEREX® Gold

### *High-solids fast drying oil for all wood floors*

TIMBEREX® Gold is a 90% solids, virtually solvent-free product made from natural, fast drying oils and resins that are designed to penetrate into the wood.

- Wear- and liquid-resistant
- Enriches wood colour with a golden sheen
- Use in sport halls, galleries, private homes and more
- Can be buffed to high sheen

#### Availability

1 & 5 litre tins

#### Coverage

15-20 m<sup>2</sup> per litre

#### Applicators

Rubber squeegee

#### Nylon pads

Brown and Red (3M or similar)

#### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

#### Maintenance

TIMBEREX® Satin Oil Gold (page 22)

TIMBEREX® Satin Oil Gold Mousse (page 23)



## TIMBEREX® Free

### Clear solvent-free fast drying oil for floors

TIMBEREX® Free is a 100% solids, solvent-free product made from natural, fast drying oils.

- Three times the coverage of other oils
- Ideal for airports, museums, sport halls, private homes and more
- Wear- and water-resistant finish
- Deep satin sheen
- Protects wood from within

### Availability

1 & 5 litre tins

### Coverage

15-20 m<sup>2</sup> per litre

### Applicators

Rubber squeegee

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

### Maintenance

TIMBEREX® Satin Oil Gold (page 22)


TIMBEREX® Satin Oil Gold Mousse (page 23)

National Museum, Sweden




**TIMBEREX<sup>®</sup>**

*wood finishing oil*

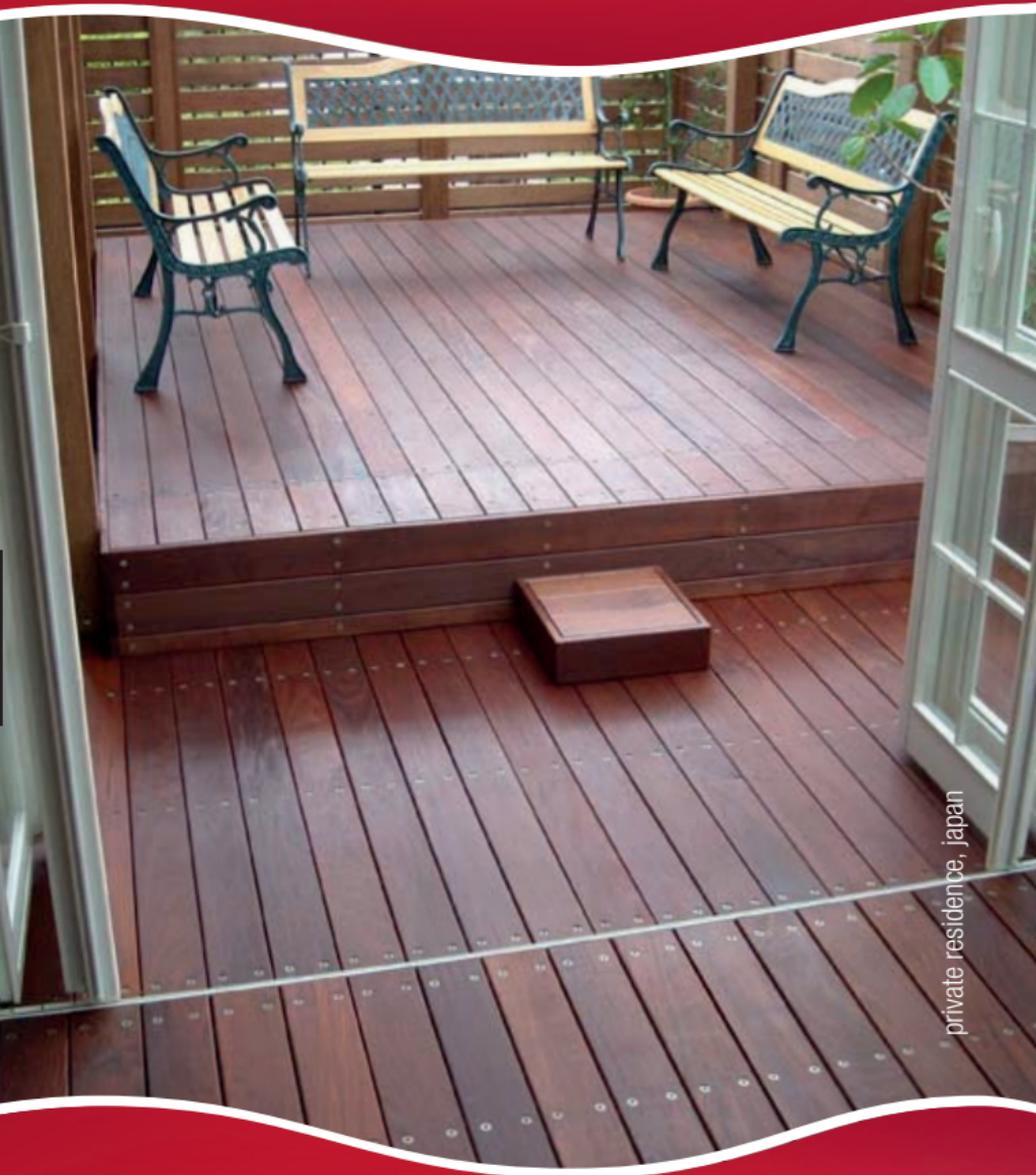

private residence, japan

*Exterior*

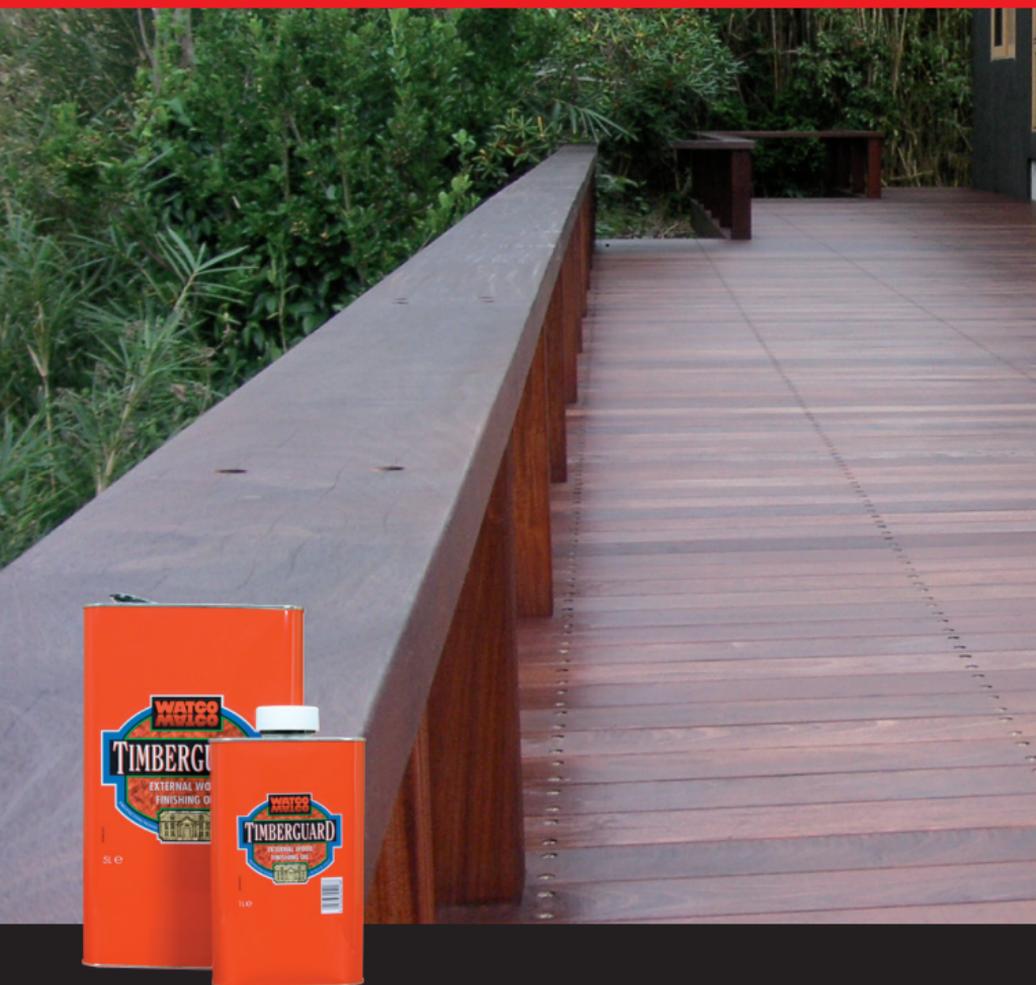


## TIMBERGUARD®

### *A natural protective oil for exterior use*

TIMBERGUARD® is designed for the treatment and care of exterior wooden furniture, doors, decking, windows etc. Timberguard is being offered in Clear, Teak and Bangkirai.

- For all wood species
- Contains UV-filters to protect wood from ageing
- Deep-penetrating, hardening natural oil
- Easy to apply by roller, brush or cloth

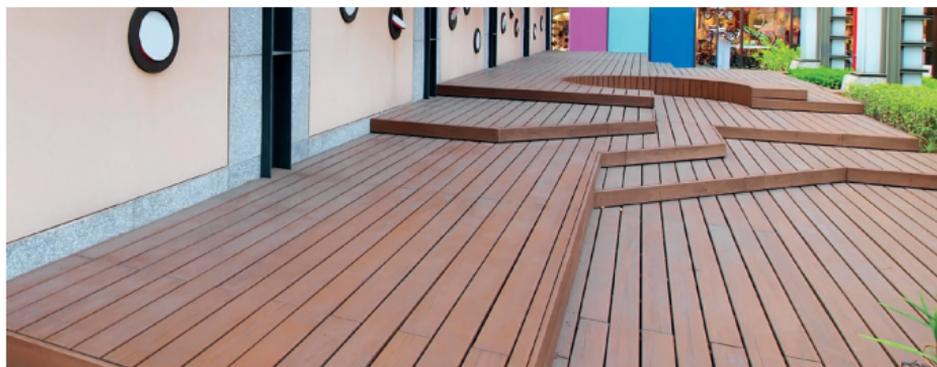



Outdoor terrace, Japan



**Availability**  
1 & 5 litre tins

**Coverage**  
6-10 m<sup>2</sup> per litre

**Applicators**  
Roller or brush

**Nylon pads**  
Red or blue  
(3M or similar)

**Cleaner**  
TIMBEREX® Bio-C neutral cleaner  
(page 24-25)

**Maintenance**  
Timberguard or Timberguard Mousse  
(page 16-18)



## TIMBERGUARD® Mousse

*A maintenance mousse based upon  
TIMBERGUARD® for regular maintenance*

TIMBERGUARD® Mousse is an easy to use maintenance foam based upon our popular TIMBERGUARD® Exterior Oil.

The mousse contains an active UV-inhibitor, slowing down the bleaching effect from harmful UV-radiation from the sun. The mousse also contains natural biocides which will protect the wood from fungus and algae. The surface will be touch-dry within an hour and will become water-resistant after 24-48 hours

### Availability

150 ml.

### Coverage

20-30 m<sup>2</sup> per can.

### Applicators


Pad or cloth.

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner  
(page 24-25)

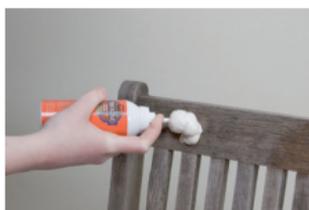

TIMBEREX®

*wood finishing oil*



Roskilde library, Denmark

*Maintenance*



## TIMBEREX® Satin Oil

### *Maintenance oil for oil treated surfaces*

TIMBEREX® Satin Oil is used for periodic maintenance of floors treated with natural drying oils.

- Labour-efficient, easy and rapid maintenance
- Surface dry after 3-6 hours
- Re-sanding normally not necessary
- One layer is sufficient





### Availability

1 & 5 litre tins

### Coverage

15-20 m<sup>2</sup> per litre

### Applicators

Rubber squeegee

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

### Maintenance Oil for

Timberex Natural/Coloured (page 6-7)

Timberex Heavy-Duty/UV Plus (page 8-9)



## TIMBEREX® Satin Oil Gold

### *A clear high solids maintenance oil*

TIMBEREX® Satin Oil Gold is a high solids maintenance product for periodic maintenance of floors treated with natural drying oils.

- Labour-efficient, easy and rapid maintenance
- Surface dry after 2-4 hours
- Re-sanding normally not necessary
- Can be buffed to high sheen

### Availability

1 & 5 litre tins

### Coverage

40-60 m<sup>2</sup> per litre

### Applicators

Rubber squeegee

### Nylon pads

Red or blue (3M or similar)

### Cleaner

TIMBEREX® Bio-C neutral cleaner (page 24-25)

### Maintenance Oil for

TIMBEREX® Gold (page 13)

TIMBEREX® Free (page 14)

TIMBEREX® Wax Oil (page 12)

Hallwylska museum, Sweden



Health Farm, Latvia

## TIMBEREX® Satin Oil Gold Mousse

*Maintenance Mousse for interior use on all Oiled surfaces.*

TIMBEREX® Satin Oil Gold Mousse is a unique product maintenance product for periodic maintenance of floors treated with TIMBEREX® Free, TIMBEREX® Wax-Oil and TIMBEREX® Gold.

- Removes marking and restores surface finish
- Labour-efficient, easy and rapid maintenance oil
- Surface dry after 1-2 hours
- Re-sanding normally not necessary

### Availability

150 ml.

### Coverage

20 - 30 m<sup>2</sup> per 150 ml

### Maintenance Oil for

TIMBEREX® Gold (page 13)

TIMBEREX® Free (page 14)

TIMBEREX® Wax Oil (page 12)



## TIMBEREX® Bio-C

### *pH7 neutral cleaner for oiled surfaces*

TIMBEREX® Bio-C is a gentle cleaning agent that has been specially formulated for use on oiled timber floors.

- Neutral (pH7)
- Non-foaming
- Low viscosity, disperses easily in cold water
- Biodegradable and non-hazardous
- Does not contain perfumes or colouring agents
- Solvent-free
- Very low odour





Hotel Flora, Germany



**Availability**

1 & 5 litre units

**Light cleaning**

Mix 100ml of Bio-C with 5 litres of water

**Heavy cleaning**

Mix 250ml of Bio-C with 5 litres of water



## TIMBEREX® Oil & Wax Remover

### *The alternative to sanding*

TIMBEREX® Oil & Wax Remover provides an alternative solution to sanding by, chemically removing all residue oil and wax from wooden surfaces without damaging them. Product strength is easily adjusted to suit each project by adding more or less water.

- Safe, easy application
- Dries in minutes
- Removes accidental splashes on other surfaces or tools

### **Availability**

1 litre tins

### **Coverage**

7-10 m<sup>2</sup> per litre

### **Applicators**

Brush, Roller

**TIMBEREX<sup>®</sup>**

*wood finishing oil*



Holckenhavn Castle, Denmark

*Water-based stains*



## TIMBEREX® Aqua

**Water-based stains for colouring wood**  
TIMBEREX® Aqua is a range of water-based stains for interior use that penetrate deep into the wood for a lasting colour effect without losing the 'wood' look.

- Ready for topcoat in a few hours
- Up to 20m<sup>2</sup> per litre
- Very low VOC
- Mix colours for a wide range of effects

### Availability

1 & 5 litre

### Coverage

18-20 m<sup>2</sup> per litre

### Applicators

Foam paint roller

### Nylon pads

Red, blue or patina (3M or similar)

### Cleaner

TIMBEREX® Bio-C (page 24-25)



### Maintenance

TIMBEREX® Enviro Oil (page 32)

✓ First treatment

✓ Maintenance

✓ Colouring

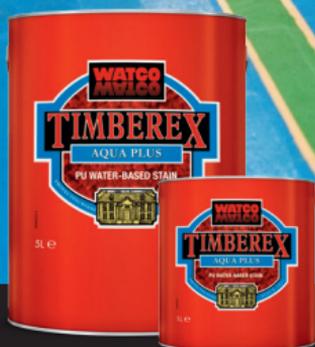

Black




White



Blue



Red



Yellow



Yellow oxide



Red oxide

Colours are shown for guidance only

## TIMBEREX® Aqua Plus

### *Water-based coloured wood finish*

TIMBEREX® Aqua Plus is a water-based polymer wood coating for fast and easy protection in any colour.

- Stains and protects at the same time
- Apply 2 coats in one day
- Up to 15 m<sup>2</sup> per litre
- Very low VOC
- Mix colours for a wide range of effects

### Availability

1 & 5 litre

### Coverage

12-15 m<sup>2</sup> per litre

### Applicators

Micro-fibre roller

### Nylon pads


Patina disk

### Cleaner

TIMBEREX Bio-C (page 24-25)

### Topcoat & Maintenance

TIMBEREX Aqua Plus

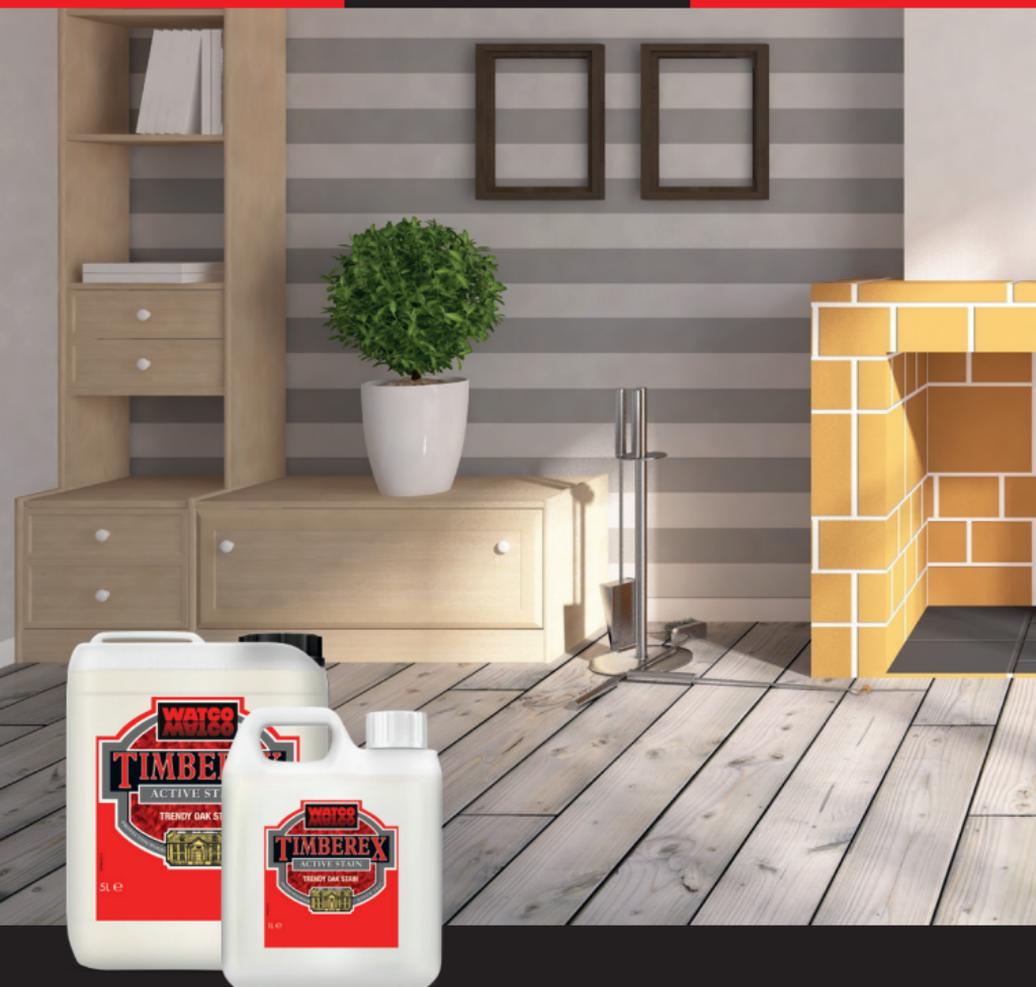

## TIMBEREX® Active Stain

### *Oak Stains for trendy grey shades*

TIMBEREX® Active Stain is a range of water-based grey stains that penetrate deep into the wood for a lasting grey 'weathered wood' look.

- One layer is sufficient for colour
- Water-based & non-corrosive
- Very low VOC
- Easy application

**Availability**

1 & 5 litre

**Coverage**

8-12 m<sup>2</sup> per litre

**Applicators**

Micro fibre roller

**Nylon pads**

Red, blue or patina (3M or similar)

**Cleaner**

TIMBEREX® Bio-C (page 24-25)

**Maintenance**

TIMBEREX® Enviro Oil (page 32)

An active pre-treatment based on ferrous sulphate heptahydrate specifically designed to be used with oak wood. This material will react with the natural tannin (tannic acid) in the oak.



## TIMBEREX® Enviro

*Transparent Wood protection with low VOC for a trendy raw timber look*

TIMBEREX® Enviro Oil is a low-VOC wood oil for protection against stains and wear. Very rapid curing saves time and costs.

- Topcoat for TIMBEREX® Aqua & Active Stain
- No yellowing or darkening
- Very low VOC
- Clear and raw timber versions for different gloss





#### Availability

1 & 5 litre

#### Coverage

16-18 m<sup>2</sup> per litre

#### Applicators

Foam paint roller or squeegee

#### Nylon pads

Red, blue or patina (3M or similar)

#### Cleaner

TIMBEREX® Bio-C (page 24-25)

#### Maintenance

TIMBEREX® Enviro Oil

## Application guide for TIMBEREX® Oils

The following is a general and basic guide to preparation and application. Please refer to the comprehensive instructions on products datasheets and containers.

If the surface is varnished, lacquered or otherwise sealed, sanding will have to take place before applying oil. If in doubt, contact your local floor contractor for assistance.

### Sanding

Initial: use a coarse 40-60 grade sandpaper. Sand the edges with an edge sander using one grade only. If the floor is old and/or uneven, or treated with an acid cured lacquer, varnish or paint, the initial sanding may require a coarser grade than 40.

Intermediate: use a sandpaper 20 grades higher than for initial stage.

Final: use 100-120 grade sandpaper (grade 100 for colored). Vacuum the floor carefully. Wipe the entire surface using a very well wrungout damp cloth, and allow to dry.



### Testing

Test a small unobtrusive area first if possible (especially on merbau, oil rich exotic hardwoods and parquet pre-oiled by the manufacturer) and allow to cure to ensure that the desired result is achieved.



### Application

Apply TIMBEREX® oil evenly to the bare, sanded wood with a paint pad, brush, roller or rubber squeegee, depending on which oil is being used. It is important that the area is not flooded with the oil.

Re-apply as necessary (min. 2 coats) at 15-45 minute intervals. The surface must be kept wet with the TIMBEREX® oil during the whole application period to ensure complete impregnation of the fibres.

Allow the final application to penetrate for 30-45 minutes maximum and then buff with a polishing machine (at 150 rpm) with a red or blue grade nylon pad (3M or similar). Do not allow the surface to start to cure and become sticky.



After the application it is important to remove ALL excess, unabsorbed oil with cotton cloths. See disposal information (below).


After 1-12 hours (depending on product), dry buff the surface with a Red nylon pad (3M or similar) to produce a low, satin sheen.

A higher sheen is possible by further buffing with a soft, dry cloth. Any areas which appear matt may be buffed again with a small amount of the product added to the centre of the buffing cloth.

Dry buffing may again be necessary.

The surface will normally be sufficiently dry to walk on after 12-24 hours and will gradually harden and become water-resistant after approximately 5-10 days.

If required the surface may be covered with permeable protective paper 48 hours after final dry buffing.

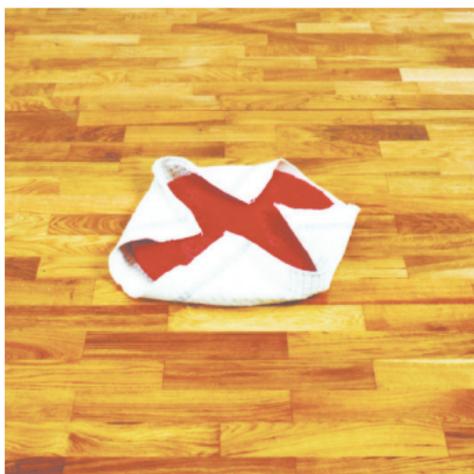

## Maintenance of TIMBEREX® treated floors

Scheduled cleaning/maintenance is essential for the floor. These instructions are the same for domestic or heavy commercial use. The only variation is the frequency.

- Sweep or vacuum the surface on a regular basis.
- Remove spillages with a well wrung-out cloth using a neutral cleaner, such as TIMBEREX® Bio-C.
- Clean the floor with a cloth dampened with diluted TIMBEREX® Bio-C or similar. Do not over-wet the floor. Cleaned surfaces should dry in no more than a couple of minutes. Amount of cleaner: Light cleaning, 100ml of Bio-C per 5 litres of water. Heavy cleaning, 250ml per 5 litres of water.
- Dry buff the floor with a buffing machine with a Red Grade 3M or equivalent pad (for commercial use). The use of high-quality mats inside and outside entrances will greatly reduce the dirt on the floor and make cleaning the floor easier and quicker.
- It is recommended to re-oil once a year or when needed.

**Watch our application videos online:**



[/timberexoil](#)

## Safety

In common with all natural oil curing products, under certain conditions applicators, cloths etc impregnated with the product can spontaneously combust. To prevent the possibility of spontaneous combustion, applicators, cloths etc should be placed immediately into a container filled with water and placed outside the building. Disposal of the contents should be in accordance with local regulations.

a **RUST-OLEUM**<sup>®</sup> brand  
**TIMBEREX**<sup>®</sup> International

Kolenbergstraat 23 - 3545 Zelem - Belgium  
Tel: +32 (0)13 460 200 - Fax: +32 (0) 13 460 219

[www.timberex.com](http://www.timberex.com)



Your Distributor: