

RUST-OLEUM®

INDUSTRIAL

COMBICOLOR®
ORIGINAL

**METAL
PROTECTION FOR
YEARS... IN
MINUTES!**



COMBICOLOR®
ORIGINAL

**Superior
metal
protection**

KNOW-HOW TO PROTECT™

WWW.RUST-OLEUM.EU



METAL PROTECTION SINCE 1921

Scottish-born sea captain Robert Fergusson noticed that the rusty deck of his

vessel stopped corroding in places where fish oil had been spilled. This discovery inspired the captain to develop the first fish oil-based anticorrosion paint.

In 1921 he perfected a type of paint that prevented rust and was capable of drying overnight without leaving any unpleasant odours. RUST-OLEUM® Corporation was born, today a world leader in the production of protective paints and coatings for industrial as well as private use.

Nowadays in the US, 96% of consumers name RUST-OLEUM® as the no. 1 rust preventive paint.



COMBICOLOR® ORIGINAL

Protection for years... in minutes!

COMBICOLOR® THE PROFESSIONAL'S
CHOICE SINCE 1985



Did you know...

...that in 1985 CombiColor® coatings were the first coatings to combine the function of a rust-preventive primer and gloss finish in one?



COMBICOLOR® ORIGINAL

METAL PROTECTION FOR YEARS... IN MINUTES!

- Direct to rust
- All weather resistant
- Sag resistant
- Interior & exterior use
- Heat resistant up to 90 °C
- No brush strokes
- Applicable from 5 °C



FOR APPLICATION ON:

Bare steel or manually derusted surfaces (use scraper/wire brush) or previously coated substrates in good condition.

AVAILABLE FINISHES:

Smooth, Satin, Matt, Hammertone, Wrought iron.



Available pack sizes: 250 ml, 750 ml, 2,5 litres and 400ml aerosols

Refer to technical datasheet for further information (www.rust-oleum.eu)


SUPERIOR METAL PROTECTION

BETTER THAN STANDARD METAL PAINT!

Long-lasting flexibility




CombiColor®
Remains flexible under all conditions

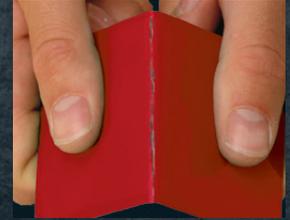

Brand X
Cracks and flakes when bent

More m²

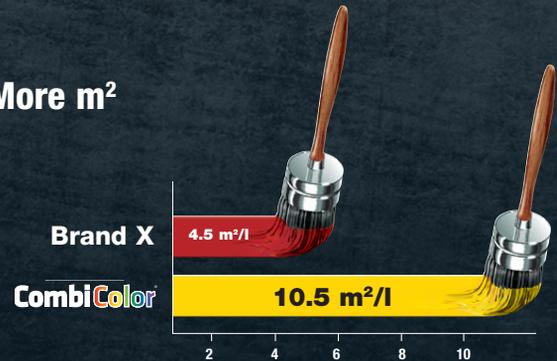

Better hiding power!



Brush out at 100 µm

COMBIPRIMER®

ADHESION PRIMER

MAKES THE SMOOTHEST SURFACE COATABLE!

3302

For use on:

Galvanised steel, Aluminium, Stainless steel, Zinc, Hard PVC, Copper, Ceramic tiles, Porcelain, Glass



Available pack sizes: 250 ml, 750 ml, 400 ml aerosol

- Easy to apply
- Transparent blue finish
- Recoatable after just 30 minutes
- Very high coverage: 35 m²/l.



Clean and degrease



Apply CombiPrimer®



Recoat after 30 min.

COMBIPRIMER®

ANTI-RUST PRIMER

FOR EVEN LONGER ANTI-RUST PROTECTION

3369
Red
brown

3380
Gray



Available pack sizes: 250 ml, 750 ml, 2.5 litre, 400 ml aerosol


- Recoatable after 2 hours
- Lead and chromate free
- Grey for light coloured topcoats
- Red for dark coloured topcoats



Remove loose rust with a wire brush



Clean and degrease



Apply CombiPrimer® (3369/3380)

COMBICOLOR®

Thinners



Standard
7301



For hammer tones
7302

CombiColor® coatings are ready for immediate use with brush or roller. For spray application however it is advised to use a CombiColor® thinner.

RUST-OLEUM®
INDUSTRIAL

COMBICOLOR® ORIGINAL INSTRUCTIONS FOR USE



1
Remove loose rust and deteriorated paint by scraping and wire brushing or sand existing glossy paint to ensure good adhesion.



2
Remove grease/oil. Surface should be clean and dry before application.



3
Apply a coat of CombiColor®. If necessary apply a second coat after 16 hrs.

TECHNICAL DATA

	CombiPrimer Anticorrosion	CombiPrimer Tack coat	CombiColor® Smooth, Satin, Matt, Wrought Iron	CombiColor® Hammer- tone	CombiColor® Aerosols
Theoretical coverage	12,8 m ² /l	35 m ² /l	10,5 m ² /l	8,5 m ² /l	2-3 m ² /aerosol
Drying times at 20 °C and 50% RH					
Dry to handle after	2 hrs	-	8 hrs	5 hrs	4 hrs
Recoat after	2 hrs	1/2 timer	16 hrs	16 hrs	2 hrs
Full hardness after	7 days	-	7 days	7 days	7 days
Thinner (item no.)	7301	160	7301	7302*	-

*7302 for spray application

COMBICOLOR® ORIGINAL PROVEN TRACK RECORD



Petrochemical plant, Belgium



Rigi train, Switzerland



Venice, Italy



Stairs at Heathrow, U.K.



CombiColor® coatings can be supplied on special request, in

more than 3.000 RAL, AFNOR, NCS, BS381C and BS4800 colours.

Smooth

Gold 7314	RAL 9006 7315	RAL 5017 7320	Marlin blue 7322	RAL 5012 7323
RAL 5015 7324	RAL 5010 7326	RAL 5002 7328	RAL 5011 7329	RAL 6018 7333
RAL 6010 7334	RAL 6011 7335	RAL 6001 7336	RAL 6005 7337	RAL 6009 7339
RAL 1013 7341	RAL 1015 7342	RAL 1018 7343	RAL 1023 7344	RAL 1021 7346
RAL 1003 7347	RAL 1007 7348	RAL 1004 7349	RAL 2000 7354	RAL 4001 7363
RAL 3000 7365	RAL 3020 7366	RAL 8001 7373	RAL 8011 7377	RAL 9005 7379
RAL 7035 7381	RAL 7001 Aluminium 7382	Silver grey 7383	RAL 7005 7386	RAL 7016 7389
RAL 9010 7392	RAL 9016 7396			

Satin

7375	7394	7378	7390
------	------	------	------

Wrought Iron

7313	7319	Due to printing limitations, colours shown may differ from actual products.	
------	------	---	--

Hammertone

7321	7327	7332	7338
7345	7362	7364	7374
7376	7384	7388	7391

CombiPrimer®

3369	3380	3302
------	------	------

Machine Colours*

7326 Ford Blue
7333 Deutz Green
7336 John Deere Green
7343 John Deere Yellow
7348 JCB excavators
7354 STILL Orange
7365 Massey Ferguson
7365 New Holland Red
7386 Deutz Grey

Identification Colours

7315 Steam
7323 Air
7334 Water
7349 Gas
7363 Acids
7365 Fire-fighting
7373 Liquid spirits
7379 Other liquids

Safety Colours

7326 Fresh water
7343 Danger
7348 Danger warning of poison, explosion, radio-active radiation
7365 Stop / forbidden / fire extinguisher

*There may be some slight variation from original manufacturer's colours.

RUST-OLEUM®

INDUSTRIAL



Find your nearest RUST-OLEUM distributor
www.rust-oleum.eu/distributors
or contact our customer services team.

Your Rust-Oleum® distributor:



@RustOleumNL



RustOleumEU



RustOleumEU

WWW.RUST-OLEUM.EU

RUST-OLEUM UK LTD. PO Box 261, Chester-le-Street, DH3 9EH, United Kingdom,
T: +44 (0)2476 717 329, F: +44 (0)2476 718 930, info@rust-oleum.eu

RUST-OLEUM EUROPE - Kolenbergstraat 23, 3545 Zelem, Belgique
T : +32 (0)13 460 200, F : +32 (0)13 460 201, info@rust-oleum.eu

V331.GB - 10.17

KNOW-HOW TO PROTECT™