

 **RUST-OLEUM®**

# EASY REPAIR PRODUCTS



**FOR CONCRETE, MASONRY  
AND ASPHALT**

**KNOW-HOW TO PROTECT®**

# RUST-OLEUM® REPAIR PRODUCTS

## EASY-TO-USE REPAIR PRODUCTS FOR ANY OCCASION

Before (re)coating a floor, repairs need to be done first. All of these problem-solving repair products can be over coated with Rust-Oleum Coatings & Primers.

For more information about these products, please go to our website [www.rust-oleum.eu](http://www.rust-oleum.eu)

- Complete range of repair products
- No cracking or shrinking
- Quickly back into service
- Convenient all-in-1 packaging



All of the products in this brochure are very low in VOC and can be used indoors and outdoors.

### Index

#### EPOXY REPAIR PRODUCTS

	Floors	Walls	Page
Regular repairs	✓		3
Small repairs	✓	✓	4
Large repairs	✓		5
Vertical repairs		✓	6
Pinholes and small repairs	✓	✓	7

#### OTHER REPAIR PRODUCTS

	Floors	Walls	Page
Cementitious repairs	✓		8
Fast repairs	✓		9
Expansion joint repairs	✓		10
Asphalt repairs	✓		11

## STRONG CONCRETE REPAIR

2 X STRONGER  
THAN  
CONCRETE!

## EPOXY REPAIR MORTAR

- Stands up to heavy traffic, oils and chemicals
- Can be feather-edged
- Does not shrink or crack
- Easy all-in-1 packaging
- For indoor and outdoor use



SUITABLE FOR  
FORKLIFT TRAFFIC

Suitable for:

- ✓ Floors
- ✓ Steps
- ✓ Bay edges

### Technical info

For use on:	Concrete, Masonry, Stone
Compressive strength:	55 MN/m <sup>2</sup>
Coverage:	1.2m <sup>2</sup> per 10kg at 5 mm depth
Recoatable (at 20°C):	6 hrs
Curing time (at 20°C):	6 hrs for light traffic / 12 hrs for heavy traffic
Application:	Trowel
Product code:	5180
Pack sizes:	2.5kg, 5kg, 25kg

## SMALL CONCRETE REPAIR



## LIGHT WEIGHT EPOXY REPAIR

- Resistant against heavy abrasion and impact
- For repairing eroded or damaged concrete or walls
- Solvent free, shrink-free repair mortar
- For indoor and outdoor use
- Suitable for heavy traffic

Suitable for:

✓ Floors

✓ Walls

✓ Ceilings

### Technical info

For use on:	Concrete, Masonry, Stone
Compressive strength:	46 MN/m <sup>2</sup>
Coverage:	6.5m <sup>2</sup> per 5 kg at 1 mm depth
Recoatable (at 20°C):	16 hrs
Curing time (at 20°C):	7 days
Application:	Trowel
Product code:	5140
Pack sizes:	5 Kg

WWW.RUST-OLEUM.EU

## DEEP CONCRETE REPAIR



## EPOXY REPAIR MORTAR DEEP FILL

- Economical repair of holes of 15 - 100mm deep
- Resistant to oils and chemicals
- Does not shrink or crack
- Easy all-in-1 packaging
- For indoor and outdoor use

\* Finish with 5180 Epoxy Repair Mortar for optimal durability

Suitable for:

✓ Floors

✓ Steps

✓ Ramps

### Technical info

For use on:	Concrete
Compressive strength:	15 MN/m <sup>2</sup>
Coverage:	0.5m <sup>2</sup> per 25kg at 3cm depth
Recoatable (at 20°C):	8 hrs
Curing time (at 20°C):	24 hrs
Application:	Trowel
Product code:	5190
Pack sizes:	25 kg

KNOW-HOW TO PROTECT®

## WALL REPAIR



## VERTI-PATCH™

- Cures as hard as granite
- Can be overcoated quickly
- Ideal for use indoors or out
- Does not slump, shrink, lift or crack
- Apply at any depth

Grey

Stone

Available colours

Suitable for:

✓ Stairs

✓ Walls

✓ Ceilings

### Technical info

For use on:	Concrete, render and stonework
Compressive strength:	28 MN/m <sup>2</sup>
Coverage:	0.6m <sup>2</sup> per 2.5kg at a depth of 5mm
Recoatable (at 20°C):	6 hrs
Curing time (at 20°C):	12 hrs
Application:	Trowel
Product code:	5110
Pack sizes:	2.5 kg

## SMALL CONCRETE REPAIR



## EPOXY PUTTY

- Repair of small cracks, air pockets and/or blow holes
- Strong 2-pack epoxy putty
- Epoxy putty for concrete repair
- Flexible putty is easy to apply
- Can be applied directly on concrete
- Solvent free, shrink-free repair

Suitable for:

✓ Floors


✓ Walls

✓ Ceilings

### Technical info

For use on:	Concrete, Masonry, Stone
Compressive strength:	75 MN/m <sup>2</sup>
Coverage:	1.3m <sup>2</sup> per 2kg at a depth of 1mm
Recoatable (at 20°C):	16 hrs
Curing time (at 20°C):	7 days
Application:	Trowel
Product code:	5412
Pack sizes:	2 kg

## CEMENT REPAIR

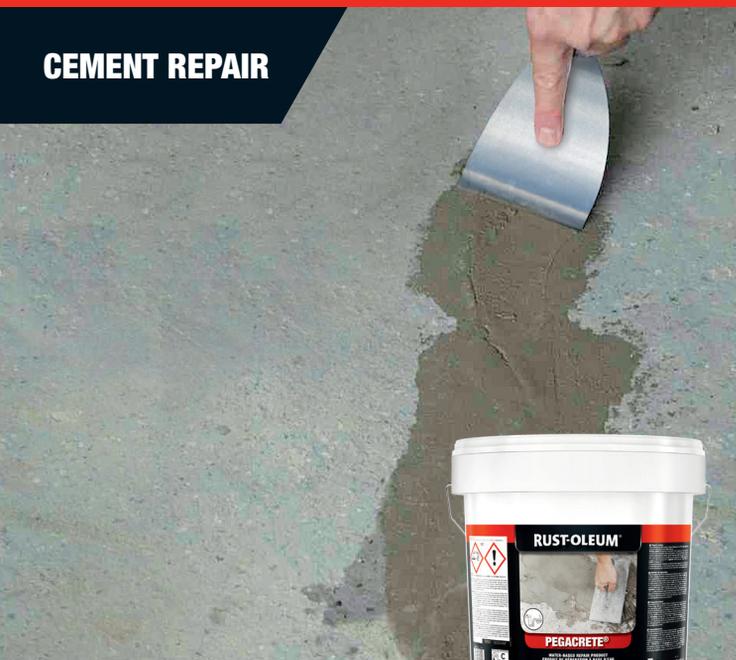

## PEGACRETE®

- Stronger than concrete
- Easy to apply
- 100% shrink resistant
- Water dilutable
- For inside and outside use

Suitable for:

- ✓ Floors
- ✓ Cement renderings
- ✓ Brickwork

### Technical info

For use on:	Concrete, Masonry, Stone
Compressive strength:	38 MN/m <sup>2</sup>
Coverage:	0.3m <sup>2</sup> per 5kg at 1cm depth
Recoatable (at 20°C):	2 days
Curing time (at 20°C):	2 days
Application:	Trowel
Product code:	168.1
Pack sizes:	5kg, 15kg

## FAST CONCRETE REPAIR



## SPEED PATCH™

- Very fast curing
- Ideal for inside and outside use
- Easy all-in-1 packaging includes primer
- Can be drilled after curing

Suitable for:

- ✓ Floors
- ✓ Steps
- ✓ Ramps

### Technical info

For use on:	Concrete, Masonry, Stone
Compressive strength:	42 MN/m <sup>2</sup>
Coverage:	0.5m <sup>2</sup> per 10kg at a depth of 1cm
Recoatable (at 20°C):	1 hrs
Curing time (at 20°C):	2 hrs
Application:	Trowel
Product code:	5150
Pack sizes:	10kg, 20kg

## EXPANSION JOINT REPAIR



## FLEXI-JOINT FILLER

- Remains flexible allowing the floor to expand/contract
- Quickly back into service; traffic after 8-12 hrs
- Durable polyurethane product
- Low odour
- Good resistance against oils and chemicals

Suitable for:

✓ Expansion joints

✓ Cracks

### Technical info

For use on:	Expansion joints and other floor joints
Compressive strength:	Remains flexible
Coverage:	10m/L for a joint 1cm wide x 1cm deep
Touch dry (at 20°C):	2 hrs
Curing time (at 20°C):	8 hrs for light traffic / 12 hrs for heavy traffic
Application:	Flat blade or knife, tape, funnel
Product code:	5160
Pack sizes:	2 liter

## INSTANT ASPHALT REPAIR



  
**INSTANTLY!**

## ASPHALT REPAIR

- Simple to use - no mixing required
- Repairs can be driven over instantly
- Ideal for repairs 10 mm – 70 mm
- Withstands heavy traffic
- Easy all-in-1 packaging includes primer

Suitable for:

✓ Roads


✓ Parking spaces

✓ Asphalt floors

### Technical info

For use on:	Asphalt
Compressive strength:	30 MN/m <sup>2</sup>
Coverage:	0,5 m <sup>2</sup> per 25kg at 24mm depth
Curing time (at 20°C):	Immediately
Application:	Shovel and Tamper
Product code:	5410
Pack sizes:	25kg

# RUST-OLEUM®

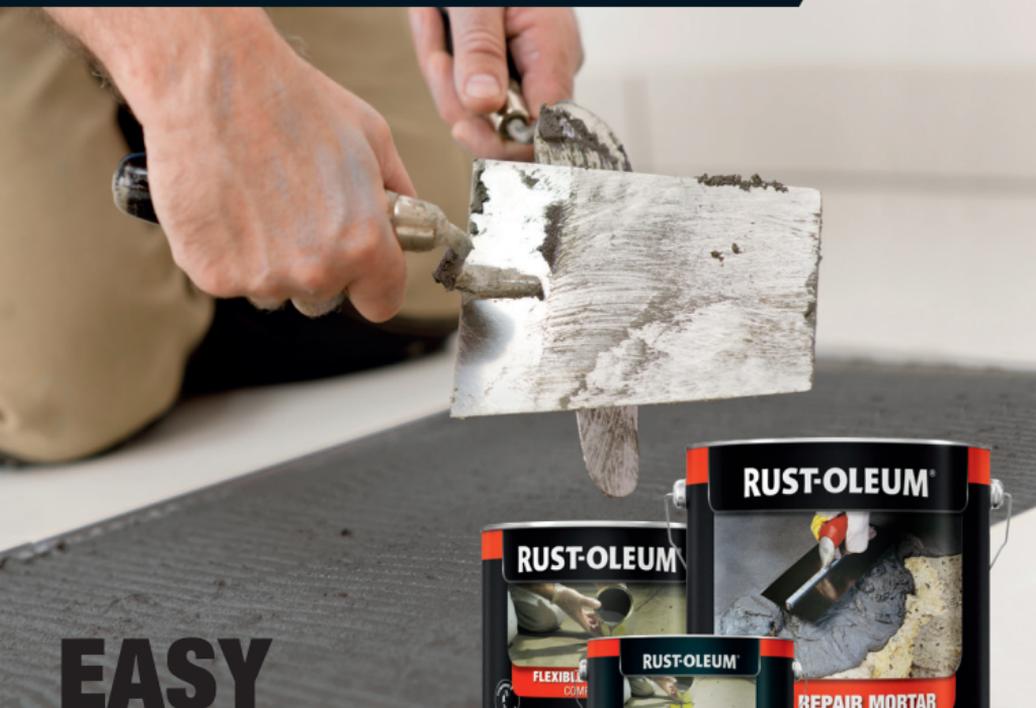

## EASY REPAIR PRODUCTS



Your Rust-Oleum® distributor:

UK: ☎ +44 (0)2476 717 329

EU: ☎ +32 (0)13 460 200



RUST-OLEUM®-products are manufactured by Rust-Oleum Europe under license from Rust-Oleum International, USA. RUST-OLEUM® and PEGACRETE® are registered trademarks of Rust-Oleum Europe. The guidelines in this brochure are provided for information purposes only. Since the manufacturer is unable to exercise any control over the correct application and processing of the products, he cannot accept any responsibility for this. © Copyright 2015 Rust-Oleum Europe. All rights reserved. The images shown in this catalogue may differ from the actual product.

**Rust-Oleum UK Ltd.** P.O. Box 261  
Chester-le-Street DH3 9EH United Kingdom  
T: +44 (0)2476 717 329  
info@rust-oleum.eu

**Rust-Oleum Europe** Kolenbergstraat 23, 3545 Zelem, Belgium  
T: +32 (0)13 460 200 F: +32 (0)13 460 201  
info@rust-oleum.eu

[WWW.RUST-OLEUM.EU](http://WWW.RUST-OLEUM.EU)

**KNOW-HOW TO PROTECT®**